













X-HYBRID

4x150W - LED - 9M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-HIBRID has been created beginning from these characteristics. It is the best solution to your needs and guarantees 3000 sgm of illuminated area. 20 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.













3000 sqm 150(l) - 0,55(l/h) battery

- Multi-directionally adjustable and tiltable floodlights
- 7 sections hydraulic vertical tower 8,5m, 340° rotatable
- Standard light sensor for machine power on and off
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 20 units per truck
- Central lifting eye longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine proteciton and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up tp 110 km/h
- 4 extendable & height adjustable stabilizers
- On board levels for guidance during stabilization







Special events



Rural & hard to reach areas



Emergency response



Construction & work sites



Gas, oil & mining operations



Military applications












20 **Units Per Truck**



You can place 20 units on a single vehicle thanks to one of the compactest footprints on the market.



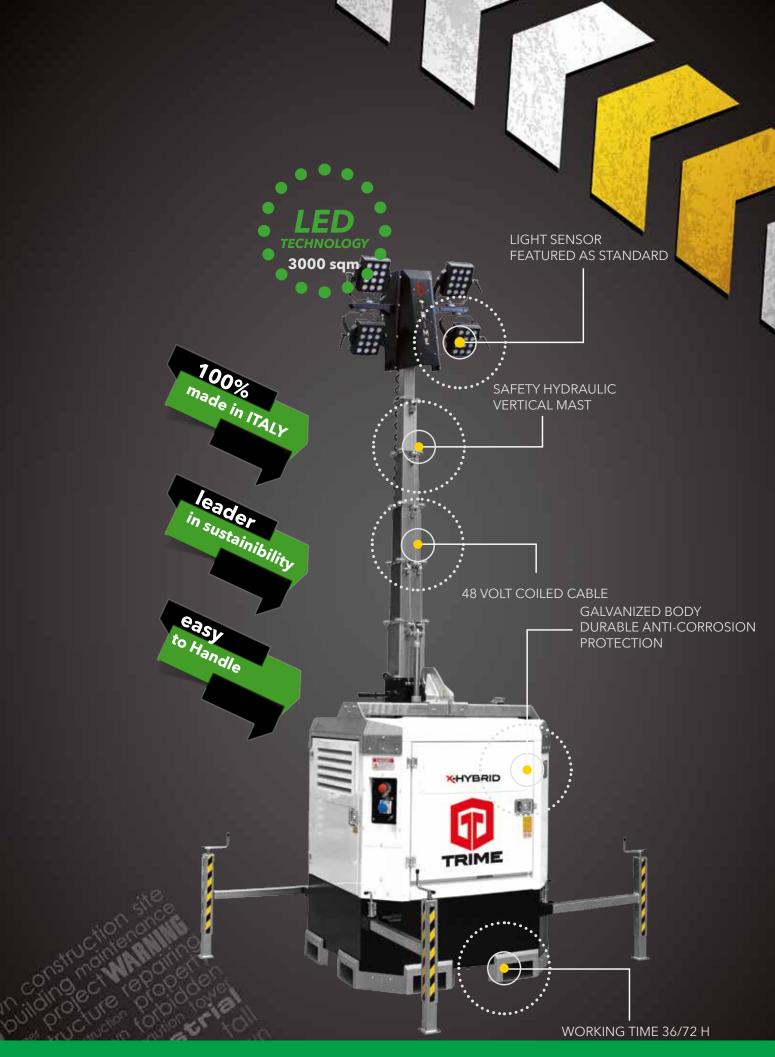



technical data

Dimensions & weight	
Dimensions min. (mm)	1200 x 1200 x 2560
Dimensions max. (mm)	2520 x 2520 x 8500
Total weight without fuel	1140 Kg
Features	
Rotation	340°
Floodlights	4x150W
IP Level	67
Options	Timer
Alternator	
Model	Linz Alumen SB
Rated output Kva	3.5
Frequency Hz	50
Voltage V	230
Insulation class	Н
Degree of Protection	IP23


Engine	
Model	Kubota Z482
Fuel	Diesel
rpm	1500
Tank capacity (I)	150
Fuel consumption (I/h)	0,55
Running time hrs	827
Noise level at 7mt	62
Batteries	
Datteries	
Туре	AGM ZL 06 130
Batteries number	4
Batteries pack	24V DC 400 Ah
Expected battery cycle	500
Expected battery life time (h)	13000
Expected battery life time (h) Hybrid mode	13000
	13000
Hybrid mode	
Hybrid mode Running time (h)	18

Complete discharge / charge cycle (h)

Hybrid mode consumption (I/h)

Standard load delivery


20 sets




Units Per Truck

Illuminated area (5 lux min.)

3000 sqm

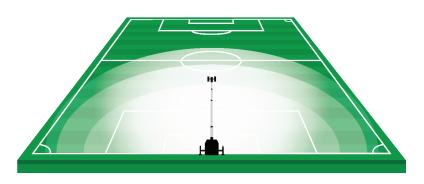



26

0,17