

light on your work



X-HYBRID
MOBILE
6X150W - LED - 9M



TRIME
Lighting Tower Specialist



X-HYBRID MOBILE

6X150W - LED - 9M

Our engineers know that the market needs a lighting tower that is rugged, long lasting and safe. The X-HYBRID MOBILE has been created beginning from these characteristics. It is the best solution to your needs and guarantees 3800 sqm of illuminated area. 7 units can be loaded on a standard truck. To all of this, we added the technology that allows for maximum fuel efficiency and reliability.



8,5m



1290 Kg



340°



3800 sqm



220(l) - 0,55(l/h)



battery

- Multi-directionally adjustable and tiltable floodlights
- 7 sections hydraulic vertical tower 8,5m, 340° rotatable
- Standard light sensor for machine power on and off
- Galvanized metalworks
- 80 µm powder coating
- Very compact dimensions for easy handling & transportability, up to 7 units per truck
- Central lifting eye longitudinal and transversal forklift pockets for effective handling
- Plug & play, colour coded cables and connectors
- Guided main coiled cable to avoid damage during tower operation
- Control panel alarms for engine protection and fuel level indicator
- Circuit breaker for electrical protection against overload
- External emergency stop button
- Fully bunded tank, 110%
- Certified wind stability up to 110 km/h
- 4 extendable & height adjustable stabilizers
- On board levels for guidance during stabilization



APPLICATIONS



Special events



Rural & hard to reach areas



Emergency response




Construction & work sites



Gas, oil & mining operations



Military applications



7
Units Per Truck



You can place 7 units on a single vehicle thanks to one of the compactest footprints on the market.

LED
TECHNOLOGY
3800 sqm

100%
made in ITALY

leader
in sustainability

easy
to Handle

LIGHT SENSOR
FEATURED AS STANDARD

SAFETY HYDRAULIC
VERTICAL MAST

GALVANIZED BODY
DURABLE ANTI-CORROSION
PROTECTION

SAFETY AMOSS KIT
AUTOMATIC MAST
LOWERING SYSTEM

4 ADJUSTABLE STABILIZERS

town construction site
building maintenance
warning
danger project repair
lower structure town caution tower
progress structure town caution tower
industry reporting site
down town site
building
danger building
site



technical data

Dimensions & weight

Dimensions min. (mm)	2944 x 1466 x 2570 mm
Dimensions max (mm)	2944 x 2928 x 8500 mm
Dry Weight	1290Kg

Features


Rotation	340°
Floodlights	6x150W LED
IP Level	67
Options	Timer

Alternator

Model	Linz Alumen SB
Rated output Kva	3.5
Frequency Hz	50
Voltage V	230
Insulation class	H
Degree of Protection	IP23

Standard load delivery



7 sets



Units Per Truck

Illuminated area

3800 sqm

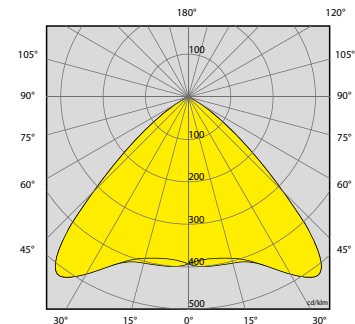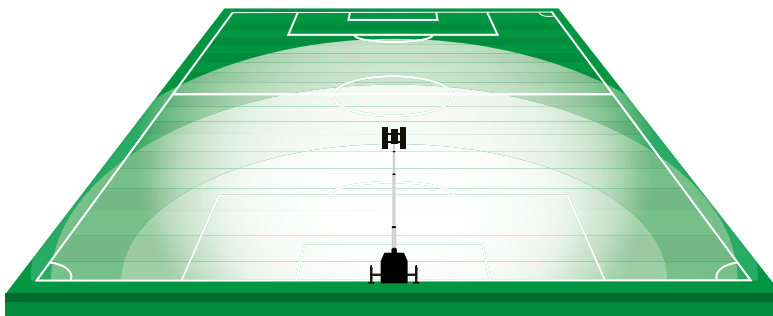

Engine

Model	* Kubota Z482
Fuel	Diesel
rpm	1500
Tank capacity (l)	222
Fuel consumption (l/h)	0,55
Running time (h)	863
Noise level at 7mt	62

* May vary based on stock availability. However, a primary equivalent brand will be used

Batteries

Type	AGM ZL 06 130
Batteries number	4
Batteries pack	24V DC 400 Ah
Expected battery cycle	500
Expected battery life time (h)	9500

Hybrid mode

Running time (h)	11
Charging time with LED's ON (h)	11
Charging time with LED's OFF (h)	8
Complete discharge / charge cycle (h)	19
Hybrid mode consumption (l/h)	0,23



Lighting Tower **Specialist**

TRIME s.r.l.

Strada per Robecco, snc
 20081 Cassinetta di Lugagnano (MI) - Italy
 Tel. +39 02 942 1724
 Sales Dept. +39 0382 406 252
 www.trime.it - info@trime.it

The TRIME policy is one of continuous improvement. The company reserves the right to modify the technical specifications and items described in this catalogue at any time and without notice for technical or commercial reasons. Product images are shown for information only