


PRODUCT INFORMATION

G200QS | Canopy Set

PRIME KVA: 180.00 | STANDBY KVA: 198.00

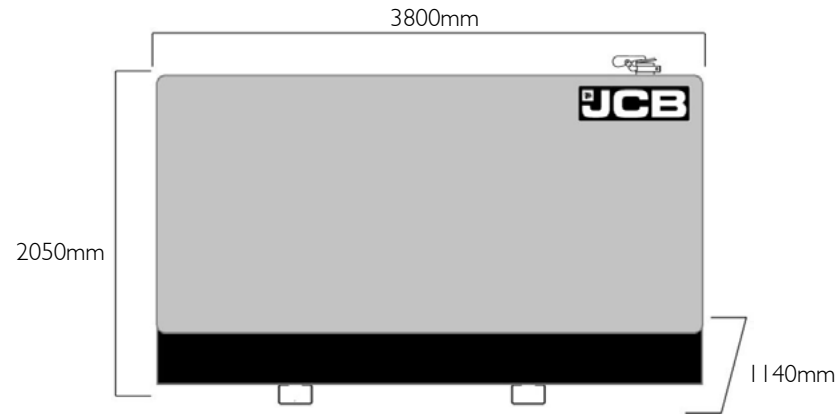

DIESEL GENERATOR

FUEL OPTIMISED

ELECTRICAL

Frequency (Hz)	Phases	Voltage (V)	Prime		Standby		MCB Rating (A)	Minimum ATP Rating (A)	Rated Speed (RPM)
			kVA	kW	kVA	kW			
50	3	400/230V	180.00	144.00	198.00	158.40	320.00	320.00	1500
60	3	380/220V	180.40	144.30	198.40	158.70	400.00	400.00	1800
60	3	220/127V	182.20	145.70	200.30	160.20	630.00	630.00	1800
60	3	480/277V	182.50	146.00	200.70	160.60	250.00	250.00	1800

POWER FACTOR

3 Phase	0.8
1 Phase	1

MAXIMUM LOAD IMPACT*

kVA	
kW	

*With 20% voltage and 10% frequency deviation @ 50Hz, 400V

ALL RATINGS ARE TO STANDARD REFERENCE CONDITIONS ISO 8528

Prime: This rating is for the supply of continuous electrical power, at variable load, in lieu of commercially purchase power. There is no limitation on the annual hours of operation and 10% over load power can be supplied for 1 hour in 12.

Standby: This rating is for the supply of continuous electrical power, at variable load, in the event of a utility power failure. No overload is permitted.

Stage IIIa models are only emissions compliant at 50Hz Prime Power in accordance with 97-68EC.

PRODUCT INFORMATION



G200QS | Canopy Set

PRIME KVA: 180.00 | STANDBY KVA: 198.00



GENERATORS IRELAND

CANOPY/SKID

Lockable Maintenance Access Doors	•
Control Panel Viewing Window	•
Fork Pockets	Δ
Single Lift Point	Δ
Bunding	Δ
Open Frame	Δ
High Density Fire Retardant Foam	•
Yellow Paint	•
White Paint	Δ
Standard: • Not Available: x Optional: Δ	

ALTERNATOR ECO38 2SN/4

Poles	4
Winding Connections	Star
Insulation	Class H
Enclosure	IP23
Exciter System	Self-regulating brushless
Voltage Regulator	AVR
Steady State Voltage Regulation	+/- 1.5%
Bearing	Single bearing sealed
Coupling	Flexible disc
Cooling	Direct drive centrifugal blower fan
Coating	Winding Protection Grey

STARTING SYSTEM

Starter Motor	kW	4.00
Battery Capacity	Ah	120
Number of Batteries		2
Auxiliary Voltage	V	24

ENGINE

1500 RPM		
Output Rating (PRP)	kW	156.40
Output Rating (Standby)	kW	172.04
1800 RPM		
Output Rating (PRP)	kW	156.40
Output Rating (Standby)	kW	172.04
Manufacturer and Model	JCB 6 CYLINDER	
Fuel	Diesel	
Injection	Direct	
Aspiration	Turbo Charged	
Cylinders	6	
Bore and Stroke	mm	106 x 135
Displacement	L	7.15
Cooling	Water	
Engine Oil Specification	API CF-4	
Compression Ratio	16.9 : 1	
Engine Oil Capacity	L	28.00
Coolant Capacity	L	26.00
Governor	Electronic	
Air Filter	Two stage with restriction indicator	
Engine Oil Consumption	100% Load	0.1% of fuel consumed

FUEL SYSTEM

Diesel Specification		EN590
Standard Fuel Tank Capacity	L	360

PRODUCT INFORMATION



G200QS | Canopy Set

PRIME KVA: 180.00 | STANDBY KVA: 198.00



GENERATORS IRELAND

FUEL CONSUMPTION

Load	Unit	Frequency	Consumption
100% Load Prime	L/h	50Hz	43.70
75% Load Prime	L/h		33.80
50% Load Prime	L/h		23.50
100% Load Standby	L/h		48.30
100% Load Prime	L/h	60Hz	43.60
75% Load Prime	L/h		34.60
50% Load Prime	L/h		23.90
100% Load Standby	L/h		47.50

EXHAUST SYSTEM

Parameter	Unit	Frequency	Value
Maximum Temperature 100% Standby	°C	50Hz	508.00
Exhaust Gas Flow 100% Standby	m ³ /min		0.021
Maximum Allowed Back Pressure	mbar		60.00
Maximum Temperature 100% Standby	°C	60Hz	455.00
Exhaust Gas Flow 100% Standby	m ³ /min		0.02
Maximum Allowed Back Pressure	mbar		70.00
Exhaust Flange Size	mm	-	

AIR SYSTEM

Parameter	Unit	Frequency	Value
Intake Air Flow 100% Standby	m ³ /h	50Hz	7.20
Total Cooling Air Flow 100% Standby	m ³ /s		0.00
Alternator Fan Airflow	m ³ /s		-
Intake Air Flow 100% Standby	m ³ /h	60Hz	-
Total Cooling Air Flow 100% Standby	m ³ /s		-
Alternator Fan Airflow	m ³ /s		-

SOUND PRESSURE (CANOPY ONLY)

Parameter	Frequency	Unit	Value
LpA (7m)	50Hz	dB(A)	65
LpA (7m)	60Hz	dB(A)	-

MECHANICAL FEATURES

Cooling Pack	•
Air Filter	•
Mechanical Governor	•
Low Oil Pressure Switch	•
Coolant Temperature Sender	•
Oil Temperature Sender	•
Radiator Guards	•
Hot Component Guards	Δ
Manual Oil Drain Pump (Canopy)	Δ
Water Jacket Heater	Δ
Pre-Filter with Separator	•
Fuel Level Sender	•
Internal Fuel Fill (Belly Tank)	•
3 Way Fuel Valve	Δ
Residential Silencer	•
Industrial Silencer	x

Standard: • Not Available: x Optional: Δ

PRODUCT INFORMATION



G200QS | Canopy Set

PRIME KVA: 180.00 | STANDBY KVA: 198.00



GENERATORS IRELAND

ELECTRICAL FEATURES

AVR DSR	●
AVR DER	x
Winding Protection Standard	x
Winding Protection Standard +	x
Winding Protection Grey	●
Winding Protection Total	Δ
Winding Protection Total +	Δ
MAUX	●
PMG	Δ
Anti-Condensation Heater	Δ
3 Pole Moulded Case Circuit Breaker	●
4 Pole Moulded Case Circuit Breaker	Δ
Earth Leakage Protection (Shunt Trip)	Δ
Preparation for Earth Spike	●
Optional Voltages	Δ
Remote Screen	Δ
Emergency Stop Button	●
External Emergency Stop Button	●
Standard: ● Not Available: x Optional: Δ	

BATTERY FEATURES

Battery Isolator	Δ
Battery Type	Lead Acid
Battery Size (Ah)	110
Number of Batteries	2
Battery Charger	Δ
Standard: ● Not Available: x Optional: Δ	

JCB COMMUNICATION AND CONTROL

4510	x
4520	●
Standard: ● Not Available: x Optional: Δ	

WEIGHT AND DIMENSIONS

Length	mm	3800
Width	mm	1140
Height	mm	2050
Shipping Volume (sea ready)	m ³	8.57
Weight*	Kg	2700.00

**Standard build with all fluids except fuel*

OPTIONAL CE PACK

EMC Certification	●
Hot Guards	●
Belt Guards	●
Earth Leakage Relay	●
Sound Power Decal	●
EU Declaration for Engine Emissions	●
Complete Machine Declaration of Conformity	●
Standard: ● Not Available: x Optional: Δ	

REFERENCE STANDARDS

JCB Generators are CE certified and conform to the following Directives (subject to a country requiring such standard):

- EN 12100, EN 13857, EN60204
 - 2006/42/CE Machinery safety
 - 2006/95/EC Low voltage
 - 2004/108/CE Electromagnetic compatibility
 - 2000/14/EC Sound Power Level (amended by 2005/88/EC)
 - 97/68/EC Emissions(amended by 2002/88/EC & 2004/26/EC)
 - Power according to ISO 8528 and ISO 3046
 - Ambient reference conditions 1000mbar, 25°C, 30% relative humidity ISO3046
- Information based on standard specification equipment unless otherwise stated.