



180 Coil Trailer

UNIT 4 PINESWAY
IVO PETERS ROAD
BATH
BA2 3ET
ENGLAND
TEL +44 (0) 1225 480488
FAX +44 (0) 1225 480484

E-mail: info@stevevick.com
Web site: www.stevevick.com

Registered No 1564477
Registered Office:
Steve Vick International Ltd
Unit 4 Pinesway
Ivo Peters Road
Bath BA2 3ET England



Spring shoot bolt
and locking hole



Galvanized
steel bars
onto inner or
outer location
holes

Central
spindle drum

Eyelet on central spindle
for ratchet strap



New
lightweight
access plates

Fitted with heavy-duty
double axle independent
suspension


Fitted with fully auto reversing
braking system

Jockey wheel
height adjuster

Handbrake

Tow bar
Assembly

Pipe re-rounder/pipe
end securer and
dispenser

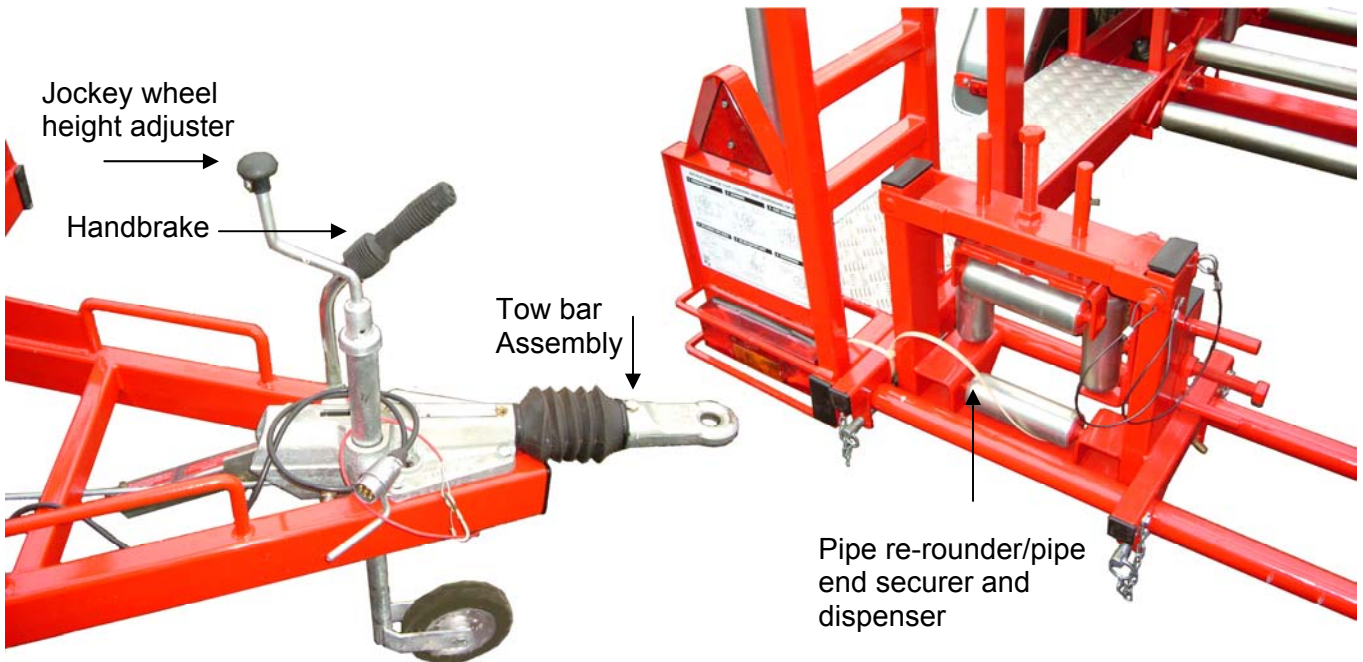



180 Coil Trailer

UNIT 4 PINESWAY
IVO PETERS ROAD
BATH
BA2 3ET
ENGLAND
TEL +44 (0) 1225 480488
FAX +44 (0) 1225 480484

E-mail: info@stevevick.com
Web site: www.stevevick.com

Registered No 1564477
Registered Office:
Steve Vick International Ltd
Unit 4 Pinesway
Ivo Peters Road
Bath BA2 3ET England

Instructions



- Apply Handbrake, lower and secure prop stands
- Attach ratchet strap to eyelet on central spindle
- Remove drum bars on central spindle and open rear gate
- Roll PE vertically into position with end of coil positioned for dispensing
- Large coils may need to be craned in
- Ensure both ends of the PE are secured:-
Front end ratchet strapped to eyelet on spindle
Dispensing end secured to fitted pipe end re-rounder/dispenser
- Close and secure rear gate
- Position spindle wheel(s) so that locking holes on either side line up
- Begin re-attaching drum bars individually - this can be safely achieved by partially rotating spindle wheel to gain access to the next drum bar hole
- To make spindle and coil rotation easier and safer use extension arm which slots over spindle stump to increase fulcrum
- When all (or as many as possible) drum bars are securely attached lock spring shoot bolts through locking holes
- Ensure tow bar assembly is correctly and safely linked up to vehicle
- Follow guidelines found on trailer for dispensing of coil

Coil Carry Capacity		
Maximum Coil Outside Diameter	4.21m	
Minimum Coil Inside Diameter	0.8m	
Maximum Coil Width	1.0m	
The following currently available coil lengths can be handled by the 180 trailer		
63mm, 75mm SDR11/17(10 Bar)	All sizes	
90mm SDR17.6 (6 Bar)	Up to 200m	
110, 125mm SDR11 or SDR 17.6	Up to 150m	
140, 160 180 SDR17.6 and 180 SDR11	Up to 100m	
Trailer Dimensions	Unloaded	Loaded with 4.21m O.D. Coil
Overall Length	5.0m	5.0m
Overall Width	2.3m	2.3m
Overall Height	3.4m	4.5m
Trailer Weight		
Un-laden (Design Weight)	1020kg	
Maximum Gross Weight	2600kg	
Maximum Payload	1580kg	