



CE MODELS | SJ 8831 SJ 8841



FULL SIZE SERIES Rough Terrain SCISSOR LIFTS

Skyjack's Full-Size Series Rough Terrain Scissor Lifts deliver huge platforms, soaring work heights and heavy duty capacities— all in one package!

The SJ 8831 and SJ 8841 feature working heights of 11,4 m and 12,5 m respectively. Both models are drivable at full height, with capacities ranging to 1134 kg allowing for maximized productivity.


As with every Skyjack model, these units use an analog based control system, featuring Skyjack's standard colour coded and numbered wiring, for ease of troubleshooting.



FULL-SIZE SERIES

Rough Terrain Scissor Lifts

Specifications	SJ 8831	SJ 8841
A Work Height	11,4 m	14,5 m
B Raised Platform Height	9,4 m	12,5 m
C Lowered Platform Height	1,5 m	1,8 m
D Overall Width	2,2 m	2,2 m
E Overall Length	3,5 m	3,5 m
F Stowed Height (Rails Up)	2,7 m	2,9 m
G Stowed Height (Rails Down)	2,0 m	2,2 m
H Platform Width (Inside Dimension)	1,7 m	1,7 m
I Platform Length (Inside Dimension)	3,4 m	3,4 m
Ground Clearance	0,2 m	0,2 m
Wheelbase	2,3 m	2,3 m
Weight	4804 kg	5212 kg
Gradeability	30%	30%
Turning Radius (Inside)	4,0 m	4,0 m
Turning Radius (Outside)	6,3 m	6,3 m
Lift Time (With Rated Load)	58 sec	56 sec
Drive Speed (Stowed)	5,6 km/h	5,6 km/h
Drive Speed (Raised)	1 km/h	1 km/h
Maximum Drive Height	7,9 m	7,9 m
Capacity (Overall)	1134 kg	771 kg
Maximum # of Persons	6	5

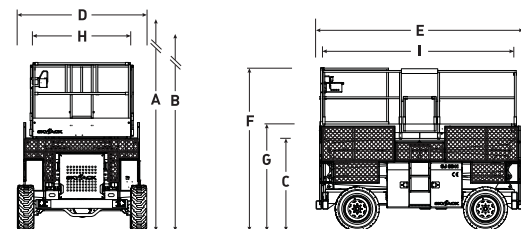

STANDARD FEATURES

- Axle based 4WD
- “No Spin” rear differential and limited slip front different
- Disc brake system on rear axle
- 29hp Kubota Diesel engine on roll out tray
- Self-centering scissor design allows optional extension decks to be added to one or both ends
- Analog control system
- Colour coded and numbered wiring system
- 30% Gradeability
- Grip lug, foam-filled tires
- Wiring for AC outlet on platform
- Tilt alarm with drive & lift cut-out
- All motion audible alarm
- Overload sensing system
- Flashing light
- Operator horn
- Fold down hinged railing system
- Half height spring hinged gates on sides
- Lanyard attachment points
- Scissor guards
- Tie down/lift lugs

OPTIONS†

- 1,2 m roll out extension deck (single or dual)
- 1,2 m powered extension deck (single or dual)
- Independent/auto leveling outriggers
- Diesel scrubber
- Shop airline to platform
- 3.5kW hydraulic generator
- Full height spring hinged gates
- Non-marking grip lug foam-filled tyres

† Capacities, and machine weights may differ when options are added

Model	Capacity With 1 Extension Deck*		Capacity With 2 Extension Decks*		
	Main	Front Ext.	Main	Front Ext.	Rear Ext.
SJ 8831	680 kg	227 kg	317 kg	227 kg	227 kg
SJ 8841	454 kg	227 kg	227 kg	227 kg	227 kg

Skyjack UK

Unit 1, Maes-y-Clawdd
 Maesbury Road Industrial Estate
 Oswestry, Shropshire, SY10 8NN
 Phone: +44-1691-676235
 Fax: +44-1691-676239
 Email: info@skyjackeurope.co.uk

www.skyjack.com

This brochure is for illustrative purpose only and based on the latest information at the time of printing. Skyjack Inc. reserves the right to make changes at any time, without notice, to specifications, standard and optional equipment. Consult the Operating Maintenance and Parts Manuals for proper procedures. CE marked work platforms are in conformance to the Machinery Directive 98/37/EC.

