

# Specifications

MODEL		GS™-3384 RT	
MEASUREMENTS		US	Metric
Working height maximum*		39 ft	12.06 m
<b>A</b>	Platform height maximum	33 ft	10.06 m
<b>B</b>	Platform height - stowed**	5 ft 1 in	1.55 m
<b>C</b>	Platform length:	13 ft .5 in	3.98 m
	outside, extended - single deck	17 ft 6.25 in	5.34 m
	outside, extended - dual deck	21 ft 6.5 in	6.57 m
<b>D</b>	Slide-out platform extension deck - front	5 ft	1.52 m
<b>E</b>	Slide-out platform extension deck - rear	4 ft	1.22 m
<b>F</b>	Platform width - outside	6 ft	1.83 m
<b>G</b>	Height - stowed:		
	folding guardrails	8 ft 9.5 in	2.68 m
	rails lowered	6 ft 6.75 in	2.0 m
<b>H</b>	Length - stowed:		
	single deck	12 ft 11.25 in	3.94 m
	dual deck	13 ft 5 in	3.98 m
	with outriggers	16 ft	4.88 m
<b>I</b>	Width:		
	standard tires	7 ft	2.13 m
	high flotation tires	7 ft 11 in	2.41 m
<b>J</b>	Wheelbase	9 ft 4 in	2.84 m
<b>K</b>	Ground clearance - center	13 in	.33 m


PRODUCTIVITY		
Maximum platform occupancy	7	7
Lift capacity	2,500 lbs	1,134 kg
Lift capacity - extension deck	500 lbs	227 kg
Drive speed - stowed	4.0 mph	6.4 km/h
Drive speed - raised	0.7 mph	1.1 km/h
Gradeability - stowed***	50%	
Maximum outrigger leveling:		
front to back	7°	
side to side	12°	
Turning radius - inside	10 ft 1.5 in	3.09 m
Turning radius - outside	19 ft 6 in	5.94 m
Raise/lower speed	45/29 sec	
Controls	proportional	
Drive	four wheel	
Tires - foam-filled rough terrain	10 x 31 in	25 x 79 cm

POWER		
Power source	Ford DSG-423 4 cylinder gas/LPG 75 hp (56 kW) Deutz D2011L03i 3 cylinder diesel 49 hp (36 kW) air cooled	
Auxiliary Power unit	12 V DC	
Fuel tank capacity	30 gal	113.6 L
Hydraulic system capacity	30 gal	113.6 L

WEIGHT****		
	12,005 lbs	5,445 kg
with outriggers	13,680 lbs	6,205 kg

**STANDARDS COMPLIANCE** ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

\* The metric equivalent of working height adds 2 m to platform height. U.S. adds 6 ft to platform height.  
 \*\* Based on RT tires. Deduct 2 in (5.8 cm) for turf and non-marking.  
 \*\*\* Gradeability applies to driving on slopes. See operator's manual for details regarding slope ratings.  
 \*\*\*\* Weight will vary depending on options and/or country standards.

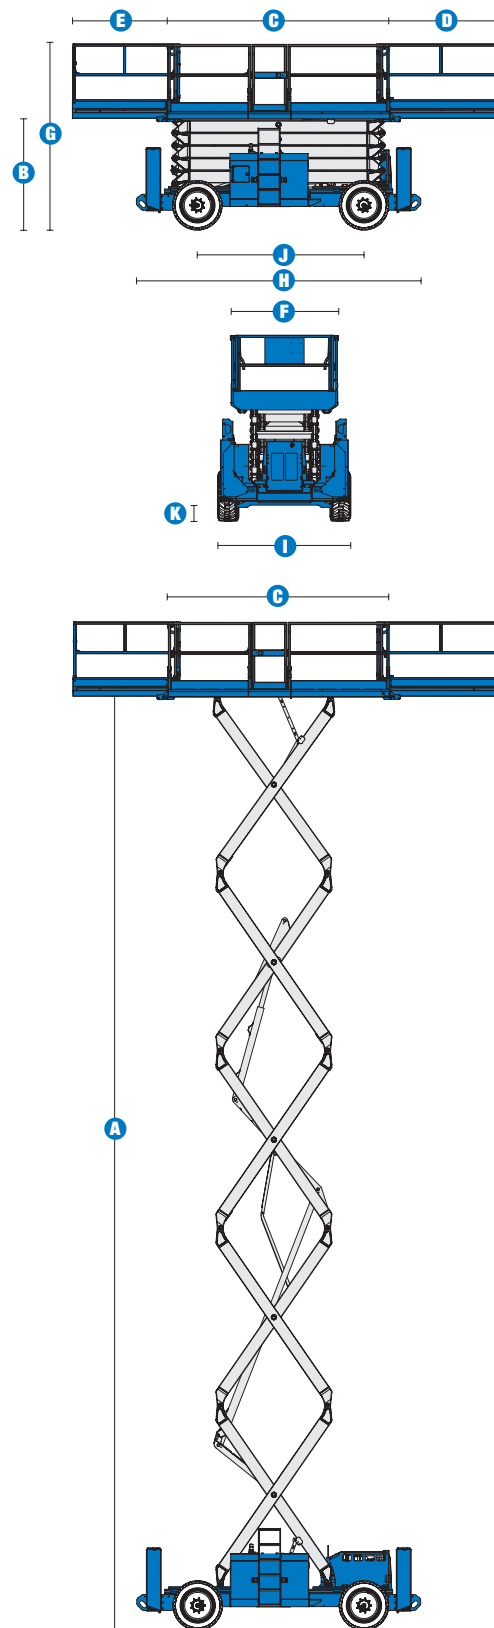

## Features

### STANDARD FEATURES

#### MEASUREMENTS

- 39 ft (12.06 m) working height
- Up to 2,500 lb (1,134 kg) lift capacity

#### PRODUCTIVITY

- 156.5 x 72 in (3.98 x 1.83 m) steel frame platform
- 60 in (1.52 m) extension deck
- Replaceable aluminum deck
- Folding guardrails
- Proportional lift and drive
- Onboard diagnostic system
- AC power to platform
- Full height swing gate
- Two self-closing gates
- 4WD
- Positive traction control
- Four-wheel braking
- Slide-out engine tray
- Foam-filled rough terrain tires
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter

#### POWER

- 12 V DC auxiliary power


### OPTIONS & ACCESSORIES

#### PRODUCTIVITY

- Dual slide-out platform extension deck package 5 ft (1.52 m) front and 4 ft (1.22 m) rear
- Automatic leveling hydraulic outriggers
- Air line to platform
- Pipe cradle (pair)
- Non-marking rough terrain tires 10 x 31 in (25 x 79 cm)
- High flotation air-filled tires 17 x 33 in (43 x 84 cm)
- High flotation foam-filled tires 16 x 33 in (41 x 84 cm)
- Dual flashing beacons
- Motion alarm
- Platform work lights

#### POWER OPTIONS

- Ford gas/LPG 75 hp (56kW)
- Deutz diesel 49 hp (36kW)
- 2000 AC Watt generator (120V/60Hz)
- Cold weather package
- Arctic package
- Hydraulic oil cooler
- Diesel scrubber/spark arrestor
- Diesel spark arrestor (without scrubber)
- LPG steel tank only, 33.5 lb capacity
- Additional LPG tank and carrier

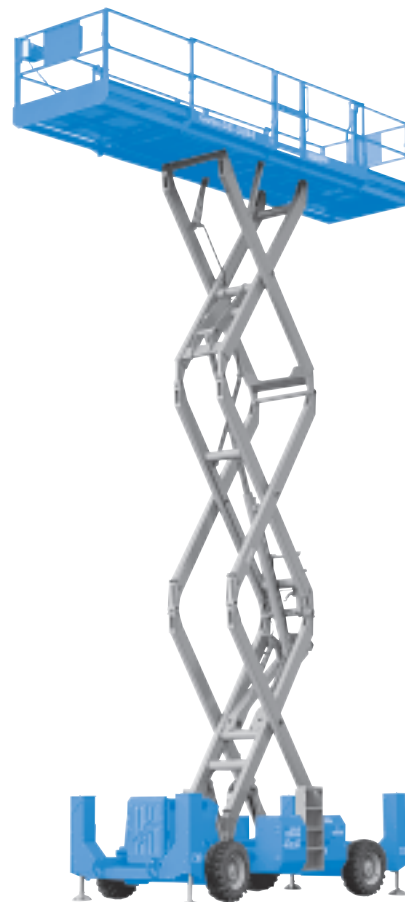

### Genie United States

18340 NE 76th Street  
P.O. Box 97030  
Redmond, Washington 98073-9730

Telephone **+1 (425) 881-1800**  
Toll Free in USA/Canada **+1 (800)-536-1800**  
Fax +1 (425) 883-3475

### Genie Europe

Millennium House  
Brunel Drive  
Newark NG24 2DE  
UK

Telephone **+44 (0)1476 584333**  
Fax +44 (0)1476 584334

Email: [infoeurope@genieind.com](mailto:infoeurope@genieind.com)

### Distributed By:

Effective Date: January, 2009. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and we make no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Terex Corporation, Genie Industries, Inc. and/or their subsidiaries in the U.S.A. and many other countries and all rights are reserved. Terex is a Registered Trademark of Terex Corporation in the U.S.A. and many other countries. Genie is a Registered Trademark of Genie Industries, Inc. in the U.S.A. and many other countries. Genie is a Terex Company. © 2009 Terex Corporation.