




LITEMAT SPECTRUM


Ready to get started with your LiteMat Spectrum?

The new LiteMat Spectrum LED fixtures offer identical functionality as their predecessors and are compatible with all existing LiteMat head accessories. LiteMat Spectrum offers the ability to create high quality white light from 2000K to 11000K. LiteMat Spectrum Luminaires are available in several sizes, from LiteMat 1 to LiteMat 4.

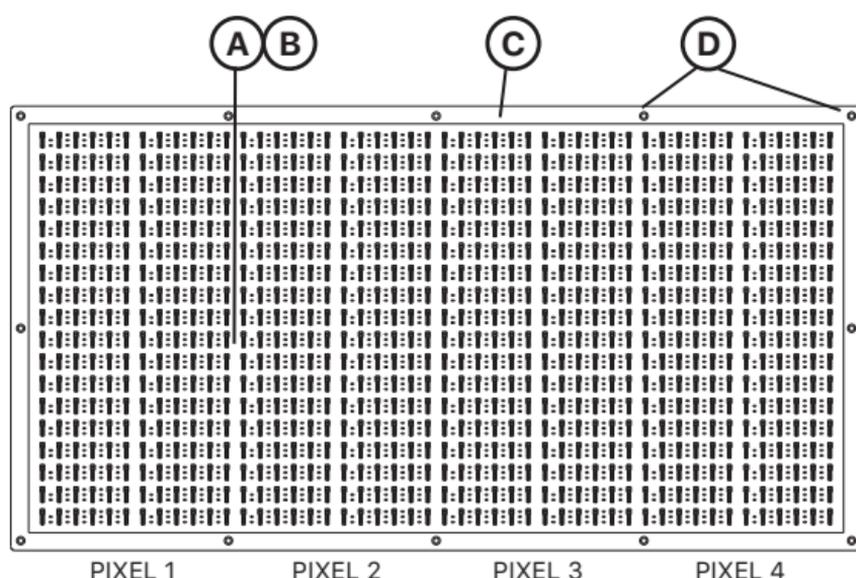

Front Panel

- A** Spectrum Light Engine
- B** Protective Clear Film
- C** Velcro™ Border
- D** Mounting Eyelets

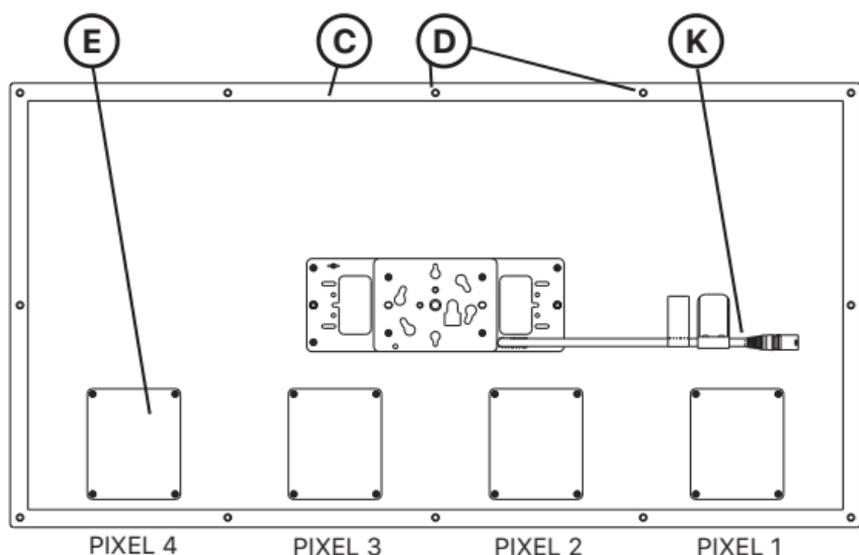


Rear Panel

- E** Pixel Control Cover
- K** PDX Pig Tail

Note: Images featured are of a LiteMat 4 fixture



LITEMAT SPECTRUM

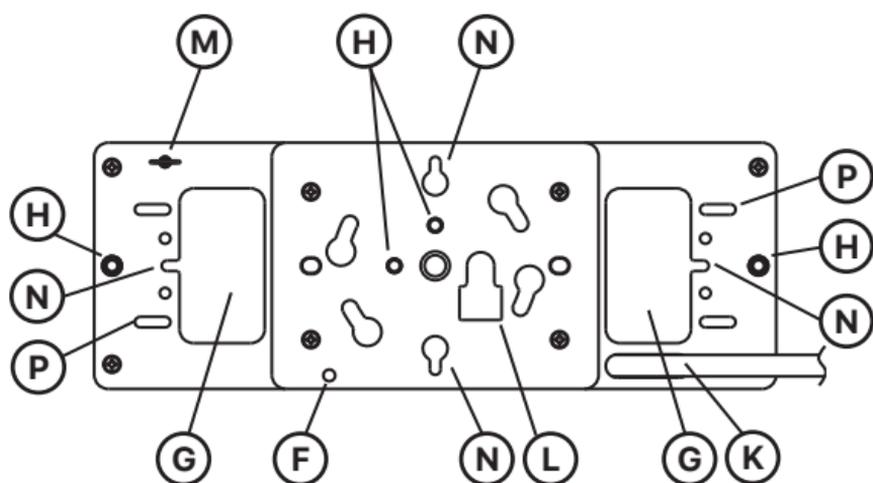

K-Mount Plate Detail

- F K-Mount Receptacle
- G Recessed Handles
- H 1/4-20 Female Threaded Inserts
- K PDX Pig Tail
- L Cold Shoe Receptacle
- M Safety Loop
- N Picture Hanging Mounts
- P Cable Tie Mounts

Specifications

- Power Rating:** 50W(LM1), 100W(LM2 & LM2L), 150W(LM3), 200W(LM4)
- Input Voltage:**..... 48VDC Power, 5VDC Signal (PDX Connector)
- Dimming Range:**..... 0% to 100% Continuous, Flicker-Free
- Software Interface:** Service Center Upgradable Software
- Mounting:** 1/4 -20 Threaded Inserts
Drywall Screw Holes
Velcro™ / Cable Tie Slots
K-Mount with Baby Pin Receiver
- Operating Temperature:**.. -10°C to +50°C (14°F to 122°F)
- IP Rating:** IP 20



For more information regarding your LiteDimmer Spectrum, please scan this code or visit www.litegear.com/spectrum